



SN116 High Attenuation Silencers


These silencers incorporate a multiple pass section to smooth the gas flow and a sound absorption section to attenuate the higher frequency sounds. They are suitable where greater sound attenuation is required and space is available. This silencer offers a higher attenuation than the industrial version. Inlet & outlet are offset.

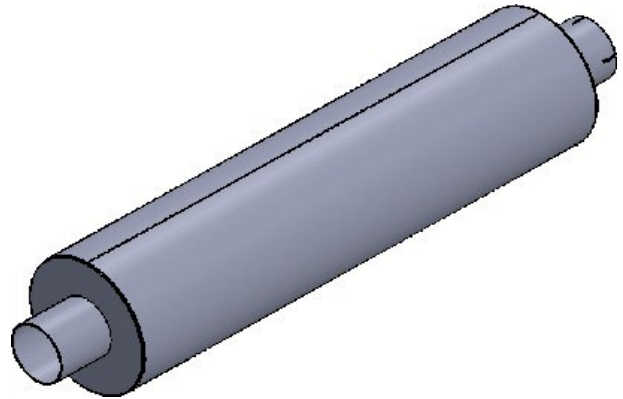


Typical SN116 Silencer Attenuation

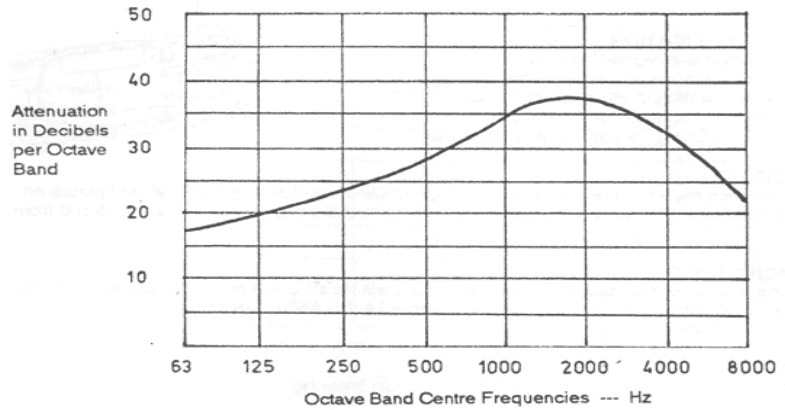

Typical SN116 Silencer Velocity/Resistance

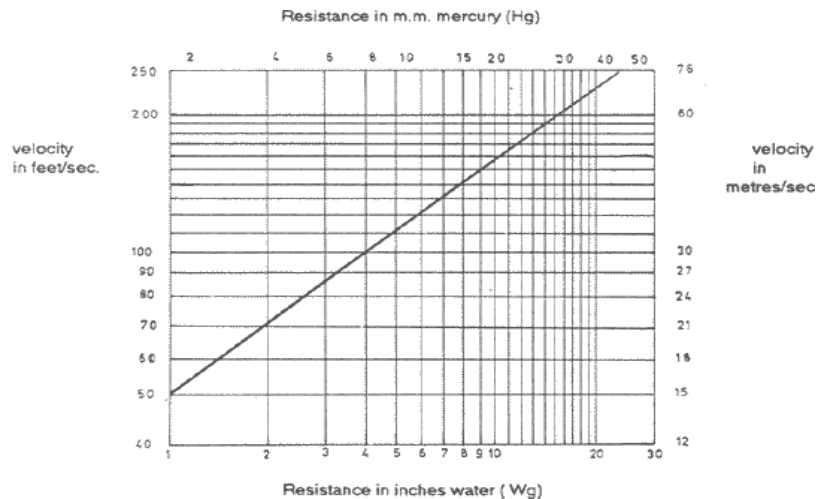

INDUSTRIAL/RESIDENTIAL/CRITICAL SILENCERS

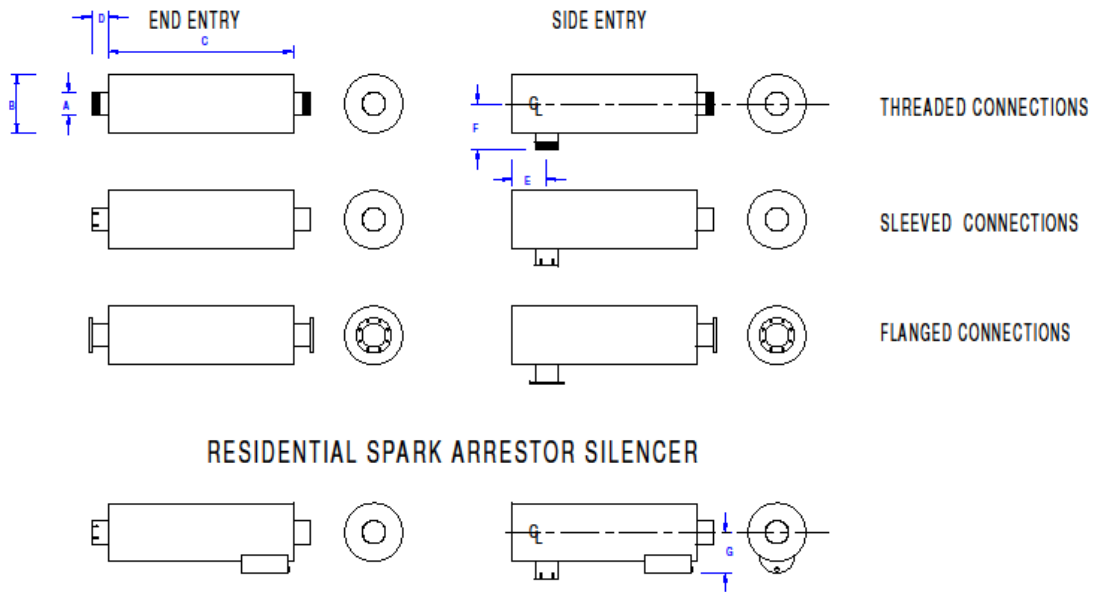

Nominal Bore (A)	Diameter (B)	Length (C)	(D)	(E)	(F)	(G)	(H)	(I)	Approx. weight (kilos)
25 (1")	101 (4")	381 (15")		38		14	16	8	2
32 (1¼")	101 (4")	457 (18")		38		17	21	11	3
38 (1½")	125 (5")	559 (22")		50		21	24	13	4
50 (2")	140 (5½")	762 (30")		50		27	30	14	7
64 (2½")	178 (7")	889 (35")		50		33	38	19	13
76 (3")	203 (8")	1000 (39")		63		41	48	22	16
89 (3½")	254 (10")	1000 (39")	76	75	203	44	51	25	27
100 (4")	279 (11")	1219 (48")	76	75	216	52	59	29	38
125 (5")	356 (14")	1219 (48")	76	83	254	65	75	37	58
150 (6")	406 (16")	1524 (60")	76	95	279	78	89	44	76

Sonic Silencers Limited
Registered in England 10627739

Richard.tanner@sonicsilencers.co.uk
+44 (0) 7720 706621

